




FLOOR PLAN

1/8" = 1'-0"

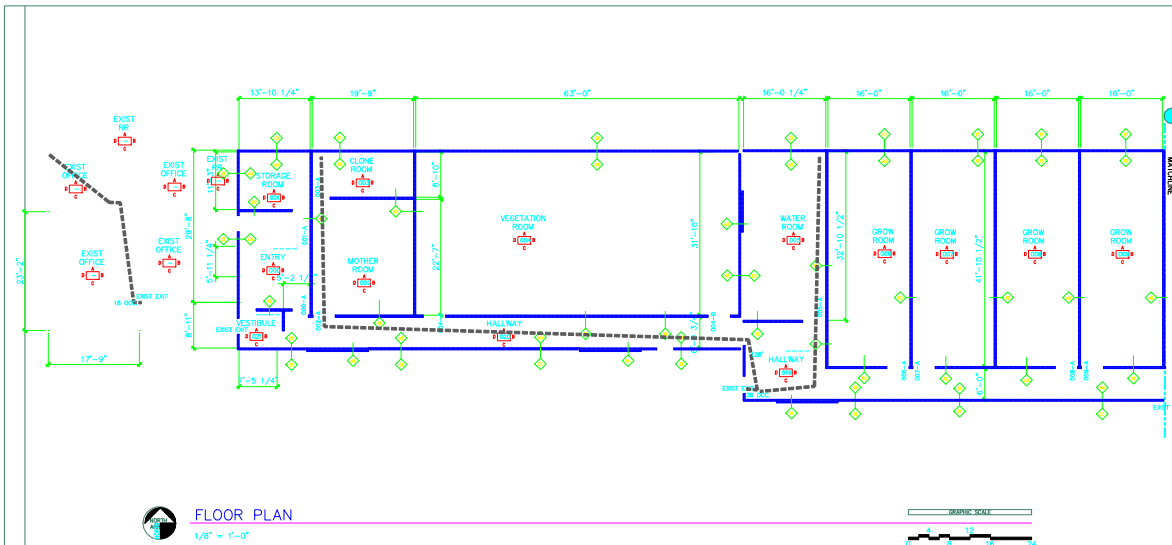

GENERAL NOTES - FLOOR PLAN

- NOT ALL KEYNOTES REFER TO ITEMS ON THIS SHEET.
- WHERE DIMENSIONAL OR DETAIL DISCREPANCIES EXIST BETWEEN THE CEILING PLANS, THE FLOOR PLANS, SECTIONS AND DETAILS, THESE DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE PROCEEDING WITH THE WORK.
- ALIGN ALL LIGHT FIXTURES, SPEAKERS, SMOKE DETECTORS, SPRINKLER HEADS AND OTHER DEVICES AS INDICATED ON THE REFLECTED CEILING PLANS (TYP. U.N.O.). VERIFY PLACEMENT w/ ARCHITECT FOR DEVICES AND FIXTURES NOT SHOWN.
- FURNITURE IS N.I.C AND IS SHOWN FOR LOCATION ONLY.
- SEE DOOR AND ROOM FINISH SCHEDULE FOR ALL DOOR AND ROOM FINISH INFORMATION.
- CONTRACTOR SHALL ADD EMERGENCY AND EXIT SIGNS THROUGH THE BUILDING AS DETERMINED BY THE CITY OF PHOENIX INSPECTORS DURING FIELD INSPECTIONS.
- COORDINATE WITH MPE FOR LIGHTING FIXTURES, DUCTS AND ALL MPE ACCESSORIES.
- SEE MPE DRAWING FOR LOCATIONS OF FIXTURES AND NOTIFY ARCHITECT FOR DISCREPANCY IN LOCATIONS.
- ALL BATHROOMS WALLS SHALL BE 1/2" CEMENT BOARD.
- INSTALL FIRE EXTINGUISHERS IN ACCORDANCE TO NFPA-10 PLEASE NOTE THAT MAXIMUM DISTANCE TRAVELLED TO A FIRE EXTINGUISHER SHALL BE 75'

WALL TYPES

- EXISTING EXTERIOR WALL
- EXISTING WALLS
- EXISTING STOREFRONT
- NEW 2x3 1/2" STEEL STUD WALL
- NEW FULL HEIGHT INTERIOR PARTITION 2x4" STEEL STUD WALL SEE STUD SPACING TABLE BELOW OR PER MANUFACTURERS RECOMMENDATIONS.
- NEW 2x6 STEEL STUD FURRED WALL AT 24" O/C WITH CEMENT BOARD EXTERIOR SHEATHING AND ONE (1) 5/8" TYPE X STEEL STUD SYSTEM EXTERIOR NEW 2x3 1/2" FULL HEIGHT STEEL STUD FURRED WALL AT 24" O/C

METAL STUD SPACING SCHEDULE

WALL HEIGHT	STUD SPEC	STUD SPACING
8'-0" TO 10'-0"	3625162-1B	2'-0" O.C.
10'-0" TO 12'-0"	3625163-1B	2'-0" O.C.
12'-0" TO 14'-0"	3625164-1B	1'-6" O.C.
14'-0" TO 16'-0"	3625165-1B	1'-0" O.C.
16'-0" TO 18'-0"	3625166-1B	1'-0" O.C.
18'-0" TO 20'-0"	3625167-1B	1'-0" O.C.
20'-0" TO 22'-0"	3625168-1B	1'-0" O.C.
22'-0" TO 24'-0"	3625169-1B	1'-0" O.C.

FOLLOW METAL STUD SCHEDULE OR MANUFACTURERS RECOMMENDED SCHEDULE.

WALL TYPES


- EXISTING DEMISING WALL
- EXISTING WALLS
- NEW 2x6 WOOD STUD WALL AT 24" O/C
- NEW 2x6 WOOD STUD FURRED WALL AT 24" O/C
- NEW 16" S60 T&B @ 24" O.C. PROVIDE T&B BLOCKING PANELS AT ENDS AND CENTER PROVIDE 2X4 SAFETY BRACING @ 6' O.C. FASTEN AT EACH JOIST WITH TWO (2) 11X 2122" NAILS MINIMUM.



INTERIOR FULL HEIGHT PARTITION - 6" METAL STUD FRAMING (2) LAYERS OF 5/8" TYPE X O.C. RD. AT PLAYROOM SIDE (1) LAYER OF 5/8" TYPE X AT ALTERNATE SIDE TO DECK ABOVE. SEE STUD SPACING SCHEDULE.

KEYNOTES - FLOOR PLAN

- NEW 3 COMPARTMENT SINK
- NEW HAND SINK
- CABINETS AND COUNTER @ +36" A.F.F. MATL. SELECTED BY OWNER
- SELF CONTAINED CONNECTION OVEN
- ADA BAR ACCESS @ +36" A.F.F.
- NEW MOP SINK
- FREEZER
- REFRIGERATOR
- ADA CLEARANCES:
 - 5'-0" DIAMETER TURN-A-ROUND
 - TOILET - REFER TO DETAIL 01/A801
 - LAVATORY - REFER TO DETAIL 02/A801
- EXISTING LOADING RAMP TO REMAIN
- INFILL EXISTING ROOF UP DOOR WITH CMU TO FULL HEIGHT TO MATCH EXISTING EXTERIOR WALL.
- INFILL EXISTING STORE WITH CMU TO FULL HEIGHT TO MATCH EXISTING EXTERIOR WALL.

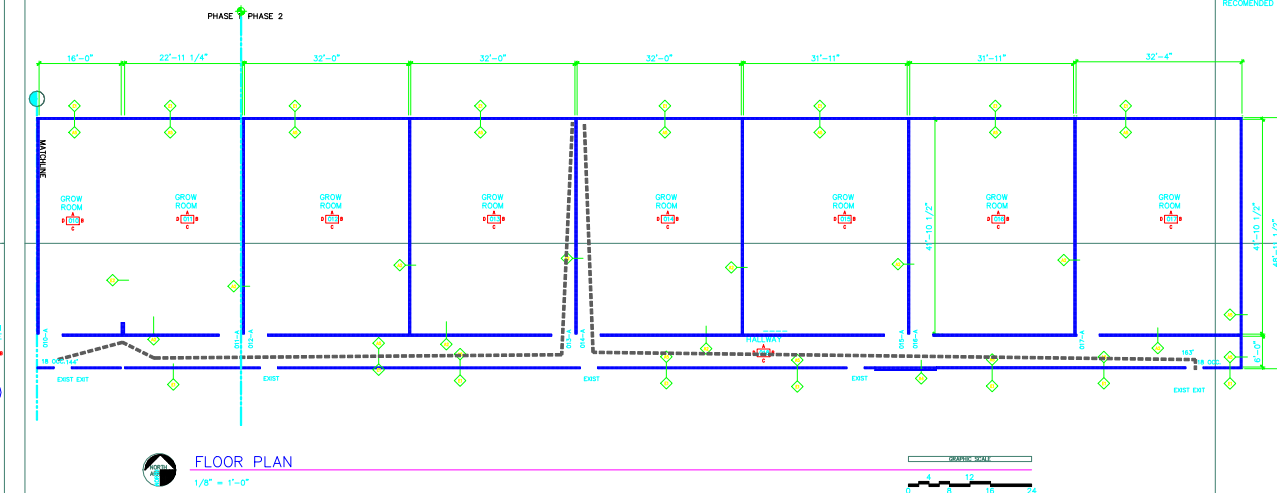


FLOOR PLAN

1/8" = 1'-0"



ENTIRE SHEET REVISED



GENERAL NOTES: PRODUCT INFO

DETAIL TITLE

0000-000

1/8" = 1'-0"